
26501112G(06) **Optional Items** 









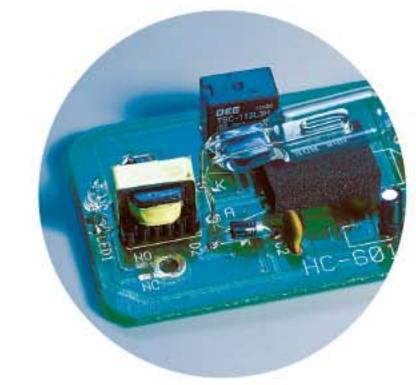

Pass-through Door Switch Module

Rotary Attachment

SmartAIR Nozzle


SmartGUARD™ Fire Alarm (Patented)

External Control Interface Board








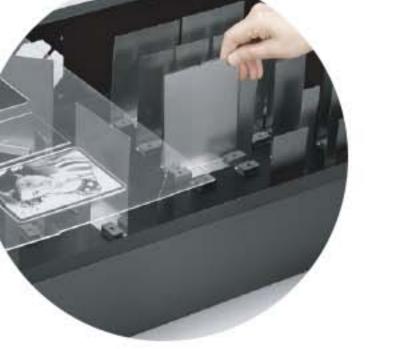





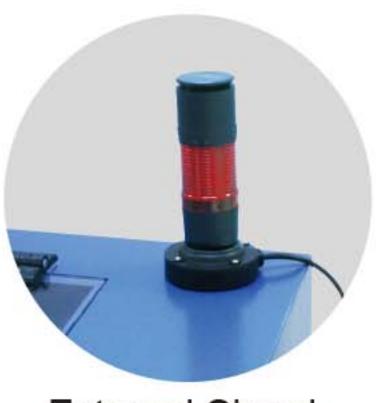

SmartPRINT<sup>TM</sup>

Flame Sprinkler System

Air Compressor Unit

Fume Extraction System

External Signal Indicator

		Accessory	Indicato
Specification		Spirit LS	
Work Area		640 x 460 mm (25 x 18 in.) Extendable to 740 x 460 mm (29 x 18 in.)	
Max. Part Size (L x W x H)	All doors closed	762 x 482.6 x 165 mm (30 x 19 x 6.5 in.)	
	All doors open	762 x $\infty$ x 165 mm (30 x $\infty$ x 6.5 in.)	
Dimensions (W x D x H)		1125 x 720 x 1005 mm (44.3 x 28.3 x 39.6 in.)	
Laser Source		12 to 100W 10.6-μm sealed CO2 Laser / 20W & 60W 9.3-μm sealed CO2 Laser	
Cooling		Air-cooled, Operating environment temperature 15°- 30°C (60°- 86°F)	
Drive		Closed-loop DC servo control	
Maximum Motor Speed		80 IPS**	
Speed Control		Adjustable from 0.1-100% (Up to 16 color-linked speed settings per job)	
Power Control		Adjustable from 0-100% (Up to 16 color-linked power settings per job)	
Engraving Capability		256-level gray scale image processing capability	
Distance Accuracy		0.254 mm or 0.1% of move, whichever is greater	
Z-Axis Movement		Automatic	
Focus Lens		Standard 2.0", optional 1.5", 2.5", & 4.0" available	
Resolution (DPI)		Available 125, 250, 300, 380, 500, 600, 760, 1000, 1500	
Interface		10 Base-T Ethernet USB Type-A 2.0 ——— – For USB storage (Max. 32GB capacity, FAT file system) USB Type-B 2.0 — For connecting with the computer	
Compatible Operating Systems		MS Windows	
Display Panel		4-line LCD display showing current file name, total working time, laser power, engraving speed, loaded into memory buffer, setup and diagnostic menus	file(s)
Safety		Class I Laser Product Compliant with EN60825, Class II Laser Product Compliant with CDRH, 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module	
Operation Voltage		Laser below 80Watt, 100-240VAC, 50-60Hz Auto Switching, Max. 15A Laser 80Watt and above, 200-240VAC, 50-60Hz, Max. 15A	
Fume Extraction System		External exhaust system with minimum flow rate 640m³/h (CFM 377 ft³/min) is required, 2.3kPA negative pressure (Pure-Air PA-1000FS @ 4" exhaust port)	
* Speed does not e	equal to throughput. S	See dealer or visit www.GCCworld.com for more details.	

<sup>\*</sup> Speed does not equal to throughput. See dealer or visit www.Gccworld.com for more details.

User Manuals for more details.













LASER RADIATION-AVOID
DIRECT EYE EXPOSURE

LASER DIODE 0.9mW MAX OUTPUT AT 640~660nm



No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China 86-512-5726-1515 Fax: 86-512-5726-1518 GCC Europe B.V. Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands 31-10-458-9367 GCC America, Inc 20453 E Valley Blvd.Walnut, CA 91789, USA

GCC Headquarters 4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax: 886-2-2694-6875

**Authorized Dealer** 

1-909-718-0248 Fax: 1-909-718-0251 US & Canada Only Toll Free: 1-888-284-5211



# Laser Engraver

Smart Innovative Evolution at Its Best



- 640 x 460 mm (25 x 18 in.) working area
- Up to 80 IPS high working speed
- Patented SmartACT<sup>TM</sup> motion control technology for higher throughput
- Closed-loop DC servo motor for precise movement of laser carriage
- Reliable DuraGuide motion system with reinforced Kevlar belt delivers superb output quality
- Pass-through front and rear doors to accommodate long working pieces (optional)
- Plug and play standard USB port for rapid data transmission
- Patented SmartGUARD<sup>TM</sup> fire alarm device to provide maximum operation safety

<sup>\*\*</sup> For 30W and above models. (60 IPS for 12W & 25W models)

 $<sup>\</sup>Delta$  Specifications are subject to change without prior notice.

<sup>\*</sup> The flow rate is determined by a default fume extraction system;

the flow rate may vary due to a different fume extraction system.

<sup>\*\*\*</sup>Please use certified brands by GCC for LaserPro USB storage, kindly refer to GCC







Laser Engraver

# GCC LaserPro Spirit LS

### **DuraGuide**

Systematic and reliable motion system embedded with strong mechanical framework, reinforced Kevlar belts, and accurate servomotor control technology to deliver superb output quality under rapid movement.





# SmartPIN AutoFocus (Patented)

The plug-and-play probe design makes focusing a one-touch process and provides the accuracy and precision required for optimum quality in the lasing process.

# SmartLID<sup>™</sup> (Patented)

An innovative lid that opens from both ends allowing easier access for daily maintenance.





# Pass-through Front and Rear Doors (Optional)

Optional front and rear door design enables loading of extremely long working pieces.

# SmartACT<sup>™</sup> (Patented)

Ground-breaking technology that reduces the ramping process, the job running time, which translates into higher productivity.





# Key Switch & Emergency Stop

Key switch safeguards the machine from unauthorized use. Prominent emergency button located on the top of the machine allows operators to stop the laser and the motion carriage immediately to provide a safe operating environment.

# **Easy to Use Control Panel**

A control panel with coherent hot-key design and graphic icon displays that allows you to directly change the laser parameter setting, set jobs to repeat unlimited times, queue jobs, delete jobs, and more.





## **Innovative Software Features**

Various user friendly features such as SmartCENTER, Defocus by pen, allows users to reduce set up time and make easy adjustments to achieve marvelous output quality.

# LaserPro Spirit LS distinguishes itself from the competition by combining output quality, reliability, and user-friendliness. With an abundance of useful and innovative features, the Spirit LS sets the standard as the industrial benchmark for laser engravers.

GCC LaserPro Spirit LS